O.M.B. No 3067-0077 Expires May 31, 1993

ELEVATION CERTIFICAT JERAL EMERGENCY MANAGEMENT A

NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). Instructions for completing this form can be found on the following pages.


	***				y ·
SECTION A PROPERTY INFORMATION					FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME F. BLAICE					POLICY NUMBER
STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER 3521 WALAPAI DRIVE					COMPANY NAIC NUMBER
OTHER DESCRIPTION (Lot and Block Numbers, etc.) LOT 59, BOW AND ARIZOW ESTATES, UNIT //					
CITY	-AGSTAFF	AZ		STATE	ZIP CODE 86001
SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION					
Provide the following from the proper FIRM (See Instructions):					
1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION
040020	0011	B	AN CAME 18,	A-2	(in AO Zones, use depth)
7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): WNGVD '29 Other (describe on back) 8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate the community's BFE: feet NGVD (or other FIRM datum—see Section B, Item 7)					
SECTION C BUILDING ELEVATION INFORMATION					
of 25.9 fee (b). FIRM Zones V1-V30, the selected diagram, (c). FIRM Zone A (without below (check one) (d). FIRM Zone AO. The fone) the highest grade level) elevated in acco 3. Indicate the elevation dat under Comments on Pagthe FIRM [see Section England of Comment)	et NGVD (or other FIRVE, and V (with BFE) is at an elevation of BFE). The floor used the highest grade ad loor used as the refer adjacent to the building trance with the commum system used in dee 2). (NOTE: If the ear, Item 7], then converts on Page 2.)	IM datum—see The bottom of the	Section B, Item 7). of the lowest horizontal struction of the lowest horizontal struction. I feet NGVD (or other FIR nee level from the selected uilding. In the selected diagram is a depth number is available ain management ordinance above reference level element used in measuring the ensity to the datum system uses the system of the system	uctural member of datum—see Set diagram is feet at e., is the building ee? Yes vations: NGV levations is differed on the FIRM	ection B, Item 7). detection B, Item 7). de
4. Elevation reference mark used appears on FIRM: Yes Tho (See Instructions on Page 4)					
5. The reference level elevation is based on: Actual construction construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the reference level floor in place, in which case this certificate will only be valid for the building during the course of construction. A post-construction Elevation Certificate will be required once construction is complete.)					
6. The elevation of the lowest grade immediately adjacent to the building is: 6893.8 feet NGVD (or other FIRM datum-see Section B, Item 7).					
SECTION D COMMUNITY INFORMATION					
1. If the community official responsible for verifying building elevations specifies that the reference level indicated in Section C, Item 1 is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowest floor" as defined by the ordinance is:					

SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 10 CERTIF TITLE COMPANY NAME 262 LAGSTA **ADDRESS** CITY STATE 6021526-031 SIGNATUR DATE PHONE Copies should be made of this Certificate for: 1) community official, 2) insurance agent/company, and 3) building owner. COMMENTS:

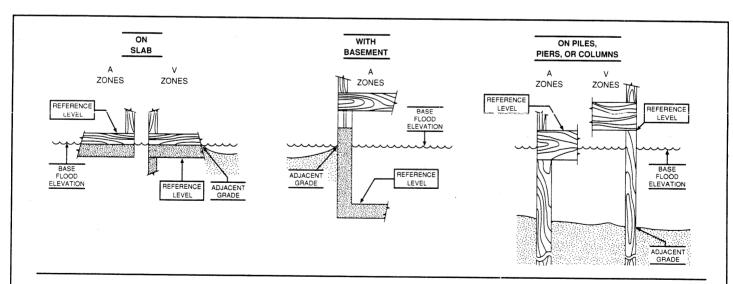

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.